




HYBRID WATER TREATMENT SYSTEM

(Capacity: 40,000 L/Hr)

OVERVIEW


Sea Desalination Plant



MBR Module




ecAOP System

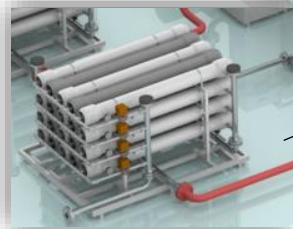

RO Module
(**TORAY** membrane)



EDI System

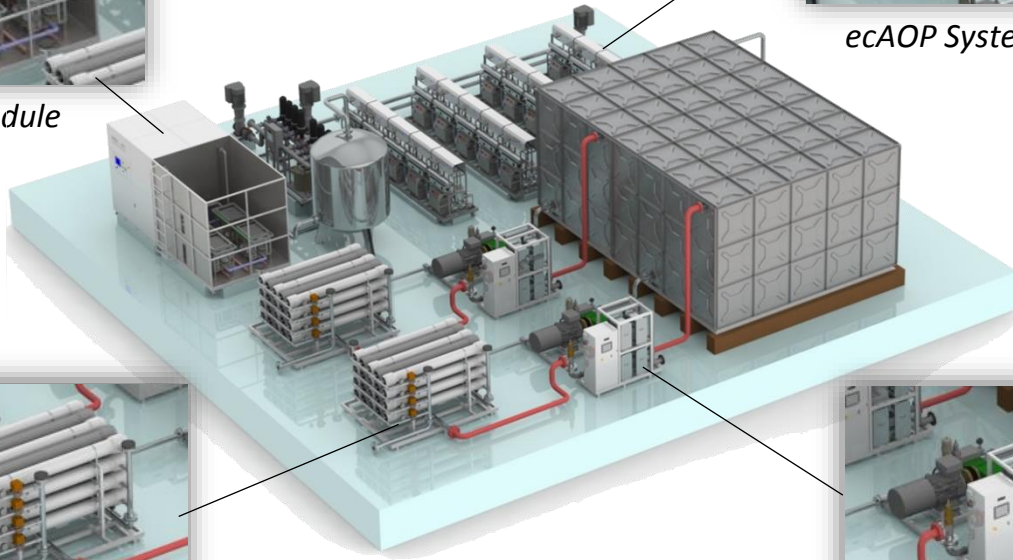

Chemical Free System



Low energy consumption



With Powder Coating



Automated Operation
with LCD Touch Screen

Features



99.8% Salt Rejection

Plant Footprint: 17 M X 17 M

Module	Capacity	Power Consumption	Power Supply
	m ³ /h	kW/h	AC, 50/60Hz
Hybrid Water Treatment System	40	255	380-440V